


# MULTI SPLIT

Multi Split provides comfort in a variety of situations  
from home to office and store.

**Control several indoor units  
with one outdoor unit.  
Build the optimum system you  
desire.**

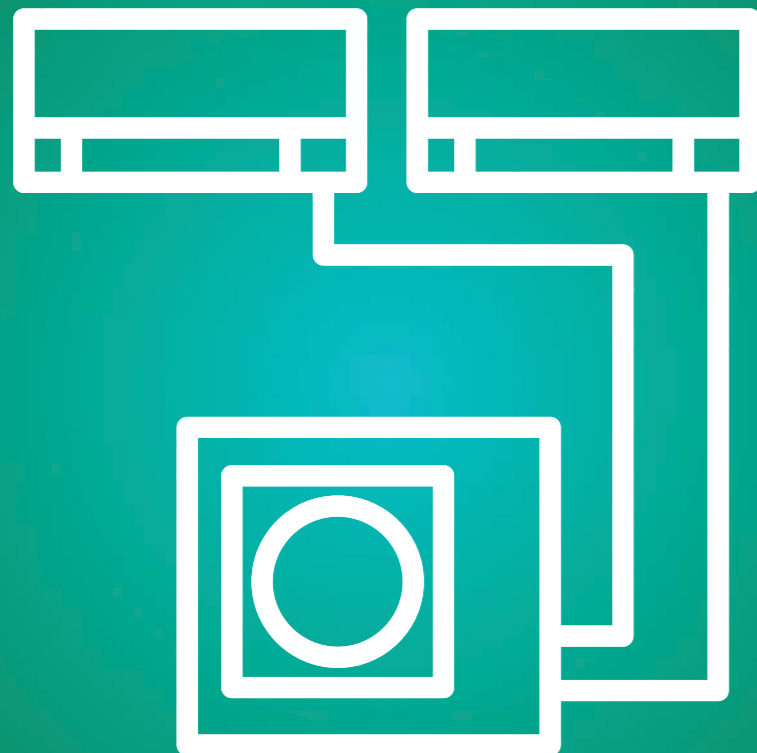







If you want to keep a large floor as well as many rooms  
comfortable,  
we recommend you use Multi Split to build a simple  
system using one outdoor unit.  
Choose from a large lineup of indoor units that best  
matches your rooms.  
You can mix and match them at will.  
Build the system that is just right for you.



- 102 MULTI SPLIT ALL TYPE LINEUP
- 104 2&3-4 ROOMS MULTI
- 106 8 ROOMS MULTI
- 110 SPECIFICATIONS OF ALL INDOOR UNITS
- 112 MULTI COMBINATION TABLE
- 124 OPTIONAL PARTS FOR SPLIT & MULTI SPLIT

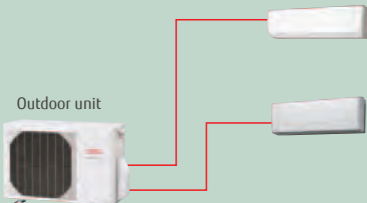Indoor unit

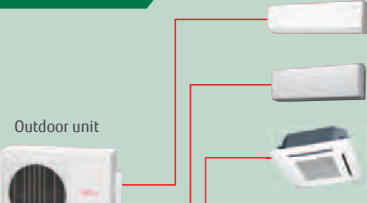Outdoor Unit : 2 ~ 4 Rooms

Model name	kW	NEW ASAG07/09/12LMCA			ASYG07/09/12LUCA			ASAG18/24LFCA		AUAG09/12/14/18LVLA				ARAG09/12/14/18/24LLLA					
		2.0	2.5	3.5	2.0	2.5	3.5	5.0	7.0	2.5	3.5	4.0	5.0	2.5	3.5	4.0	5.0	7.0	
<b>2 Rooms Multi</b> Up to 2 units 	AOAG14LAC2 	●	●	●	●	●	●	-	-	-	-	-	-	-	-	-	-	-	-
	AOAG18LAC2 	●	●	●	●	●	●	-	-	●	●	-	-	●	●	-	-	-	-
<b>3 Rooms Multi</b> Up to 3 units 	NEW AOAG20LBTA3 																		
	AOAG24LAT3 	●	●	●	●	●	●	●	-	●	●	●	●	●	●	●	●	●	-
<b>4 Rooms Multi</b> Up to 4 units 	AOAG30LAT4 	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Note : 1. 2 Rooms Multi :

Connectable indoor units are 2 units.  
AOAG14LAC2: Total capacity of indoor units connected must be between 4.0 kW and 6.2 kW.  
AOAG18LAC2: Total capacity of indoor units connected must be between 4.0 kW and 7.0 kW.

2. 3 Rooms Multi :



Connectable indoor units are 2 to 3 units.  
AOAG24LAT3: Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.

3. 4 Rooms Multi :

Connectable indoor units are 3 to 4 units.  
AOAG30LAT4: Total capacity of indoor units connected must be between 7.9 kW and 14.4 kW.

Indoor unit

Outdoor Unit : 8 Rooms

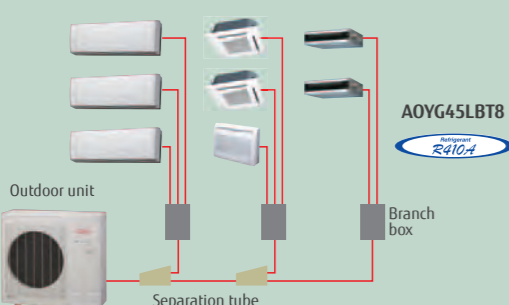Model name	kW	ASYG07/09/12/14LUCA				ASYG07/09/12/14LMCA				ASYG18LFCA ASYG24LFCC		AGYG09/12/14LVCA			ABYG14LVTA ABYG18LVTB		AUYG07/09LVLA, AUYG12/14/18LVLB					ARYG07/09LLTA, ARYG12/14/18LLTB					
		2.0	2.5	3.5	4.0	2.0	2.5	3.5	4.0	5.0	7.0	2.5	3.5	4.0	4.0	5.0	2.0	2.5	3.5	4.0	5.0	2.0	2.5	3.5	4.0	5.0	
<b>8 Rooms Multi</b> Up to 8 units 	AOYG45LBT8 	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

4. 8 Rooms Multi : Connectable indoor units are 2 to 8 units.

AOYG45LBT8: Total capacity of indoor units connected must be between 11.2 kW and 18.2 kW.

2 Rooms : AOAG14LAC2 / AOAG18LAC2

3 Rooms : **NEW** AOAG20LBTA3 / AOAG24LAT3

4 Rooms : AOAG30LAT4



**Comfortable space that matches your lifestyle**

Comfortable space can be provided to match the layout and shape of the room by 1 outdoor unit.





Powerful simultaneous air conditioning even when the rooms are different sizes.

Uneven temperature is not generated due to steady air conditioning even in L-shaped rooms.


**Top class energy saving**

Equipped with highly efficient rotary compressors (Except AOGG14LAC2) and a DC fan motor to improve efficiency. All models achieve the Ticks 4 energy saving level.

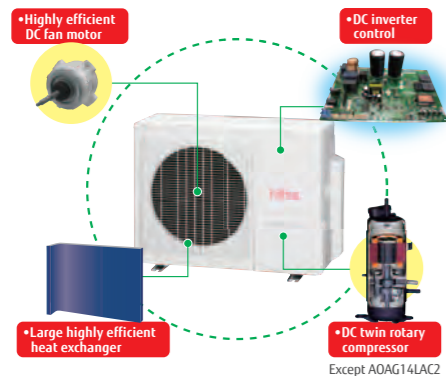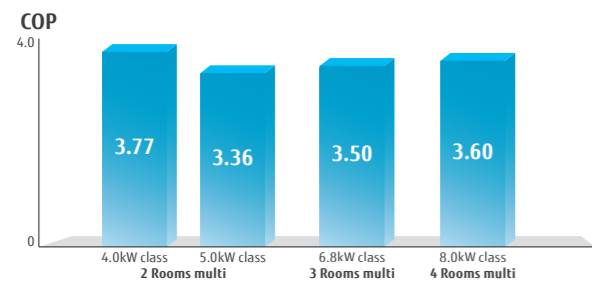


**Wide range of indoor units with various models**

3 types, 17 models are lined up in the capacity range from 2kW to 7kW class. Wide capacity range meets the needs from the private room of home or hotel to the large stores.

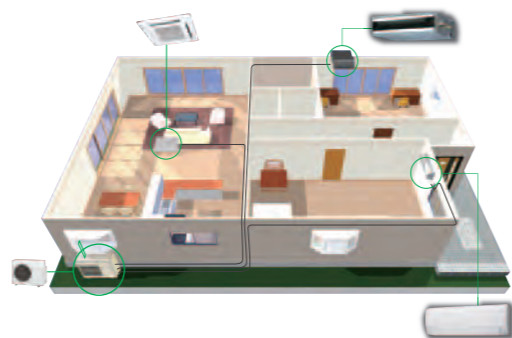

**Outdoor unit's space saving design makes for a better looking exterior**



Cooling and heating of 2 to 4 rooms is possible by only 1 outdoor unit that is nearly the same size as a single model. Spacious veranda and yard make the exterior simple.

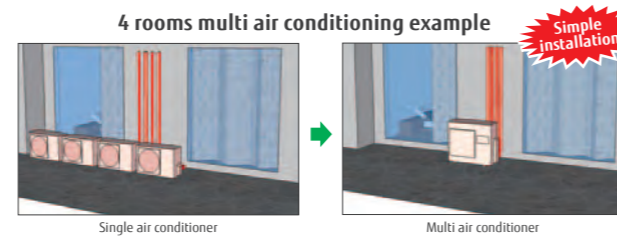

**Outdoor unit Dimensions**



**2 ROOMS**

Model: AOAG14LAC2 / AOAG18LAC2

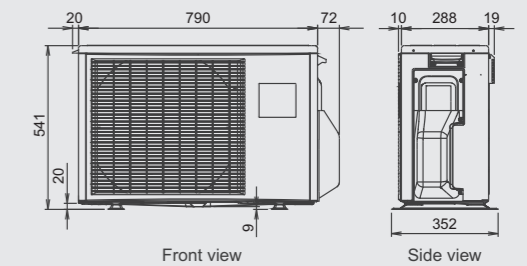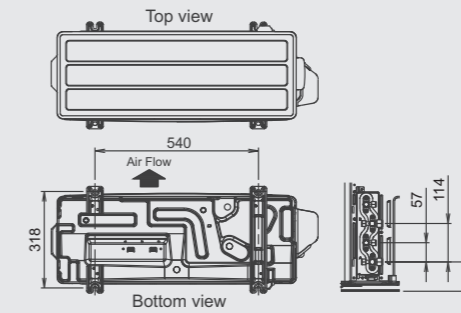



**3 ROOMS**

Model: AOAG20LBTA3 / AOAG24LAT3

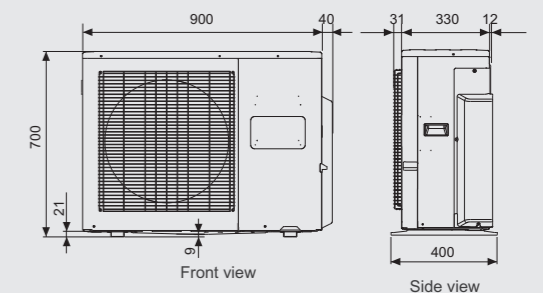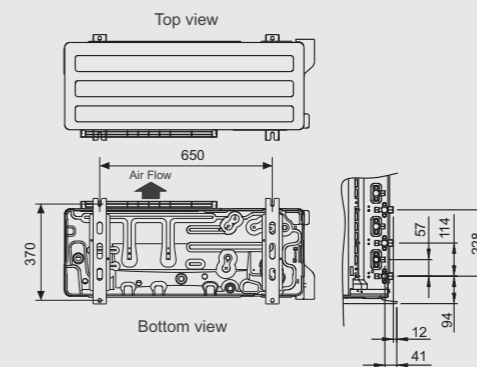

**4 ROOMS**

Model: AOAG30LAT4

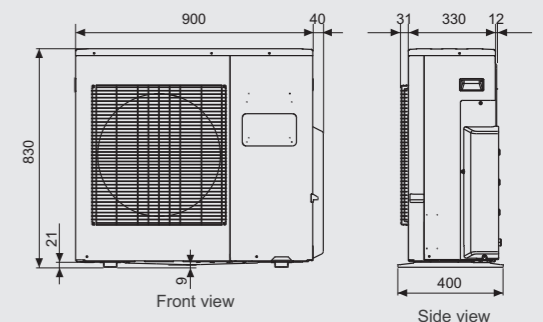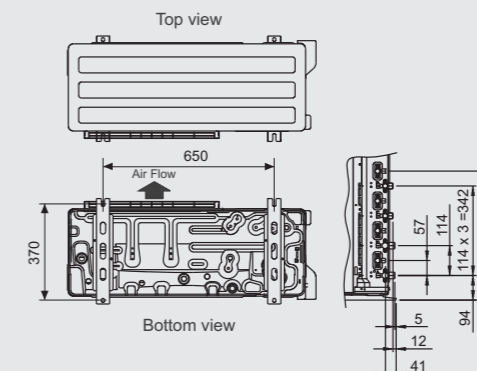

**Outdoor unit Specifications**

Model No.	Outdoor unit	AOAG14LAC2	AOAG18LAC2	AOAG20LBTA3	AOAG24LAT3	AOAG30LAT4
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Rated Capacity (min-max)	Cooling	4.0(1.4-4.4)	5.0(1.7-5.6)	5.7(1.8-8.5)	6.8(1.8-8.5)	8.0(3.5-10.1)
	Heating	4.4(1.1-5.4)	5.6(1.8-6.1)	7.8(2.0-9.2)	8.0(2.0-9.2)	9.6(3.7-12.0)
Sound pressure level	Cooling	47	51	49	48	50
	Heating	49	51	51	49	51
Net Dimension H x W x D	mm	540x790x290	540x790x290	700x900x330	700x900x330	830x900x330
Weight	kg (lbs)	37(81.6)	38(83.8)	55(121.3)	55(121.3)	68(149.9)
Connection pipe Piping Connections	Small (Liquid)	Ø6.35x2	Ø6.35x2	Ø6.35x3	Ø6.35x3	Ø6.35x4 (*Ø6.35x3, Ø9.52)
	Large (Gas)	Ø9.52x2	Ø9.52x2	Ø9.52x2, Ø12.7	Ø9.52x2, Ø12.7	Ø9.52x2, Ø12.7x2
Max. length	Total / Each	30 / 20	30 / 20	50 / 25	50 / 25	70 / 25
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.	15	15	15	15	15
	Between Indoor Units.	10	10	10	10	10
Operation Range	Cooling	10-46	10-46	10-46	10-46	10-46
	Heating	-10-24	-10-24	-10-24	-10-24	-10-24
Refrigerant		R410A	R410A	R410A	R410A	R410A

Note: Specifications are based on the following conditions.

- Cooling: Indoor temperature of 27°CDB/19°CWB. and outdoor temperature of 35°CDB/24°CWB.
- Heating: Indoor temperature of 20°CDB/15°CWB. and outdoor temperature of 7°CDB/6°CWB.
- Pipe length: 5m, Height difference: 0m. (Outdoor unit - indoor unit)

8 Rooms : AOYG45LBT8

- Suitable for large homes, shops, small buildings, and a variety of other multi installations
- Up to 8 indoor units can be connected
- Excellent installability, lightweight, compact yet high efficiency operation outdoor unit


Refrigerant Piping Parts

Separation Tube  
UTP-SX248A





Branch Box

UTP-PY03A / UTP-PY02A



High Efficiency & Compact

Compact outdoor unit

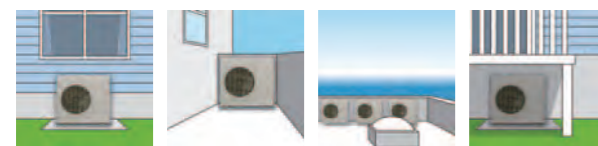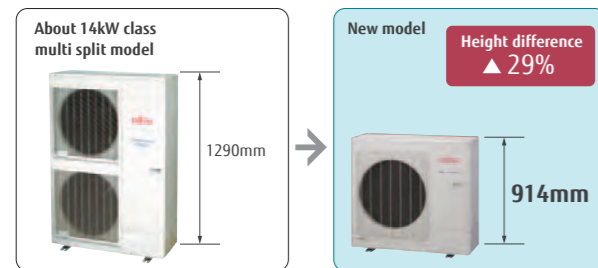


Innovated technology

- High efficiency large fan :** New high efficiency fan is mounted.
- DC fan motor :** High performance and high efficiency has been realized by using a small DC fan motor.
- Heat exchanger :** Reduced compact size and energy saving has been realized by utilizing high density piping design and 3-Row heat exchanger.
- High efficiency DC twin rotary compressor :** A high performance, low noise, large capacity DC twin rotary compressor is used.

High seasonal efficiency


The actual performance is conducted under various outside temperatures depending on weather and seasons, furthermore, especially for multi system, not all the rooms are operated all the time. So over 90% of actual operation time, air conditioners are operated at partial capacity instead of rated capacity. Considering these, we focused on energy-saving performance which is based on actual use. Efficiency of part load performance was drastically improved by developing ALL DC and our own inverter system.

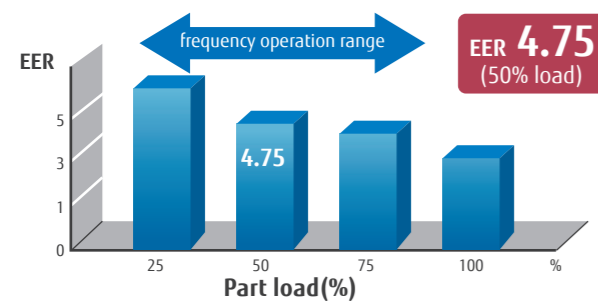

More Comfort

Quick comfort by optimized refrigerant control

Every room meet set point most quickly and comfortably by optimized refrigerant control.

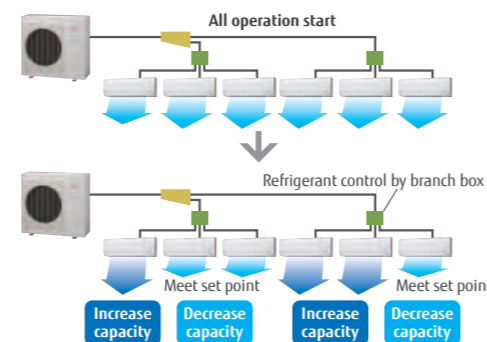

Central Remote Controller Option

Central remote controller developed for residential applications. All indoor units can be batched controlled using simple operations. Schedule management and other functions can be used to achieve even greater energy savings.

UTY-DMMYM

**Central & Individual Control**


Batched control of up to 8 indoor units. The temperature, airflow volume, and remote control prohibition settings of all indoor units can be batched.

**User-friendly operation**

- Large backlight LED screen
- Large easy-to-see operation panel


**Multiple language support**

Corresponds to 9 different languages (English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)

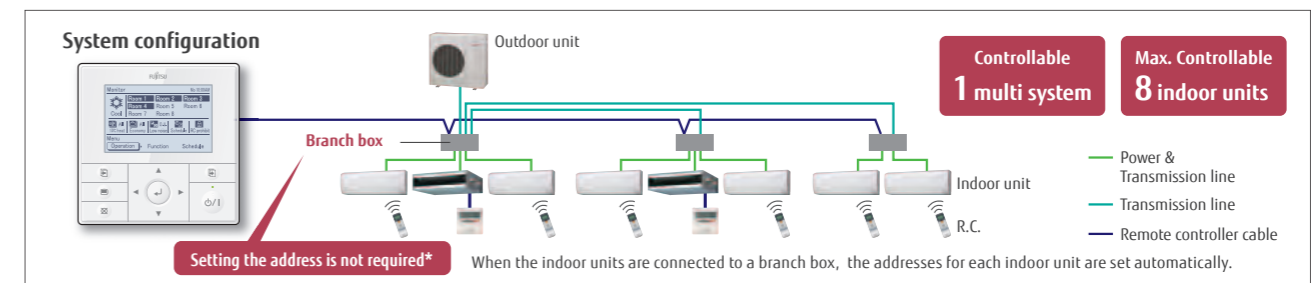


10°C heat operation

When you leave, minimum heating operation is performed to maintain the room temperature (maintain at 10°C).

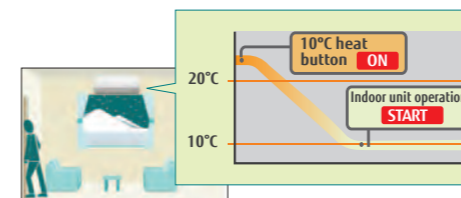

Economy operation

Economy operation is energy saving, as the set temperature of indoor unit is shifted by 1°C and the maximum electric value of the outdoor unit is suppressed.

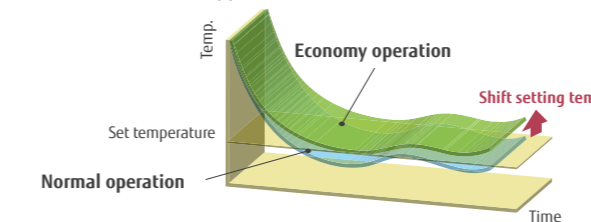


Prohibited Settings

The remote controller operation of all indoor units comes with a lock function to prevent unapproved operations in the various rooms. The central remote controller also has a key lock function to prevent children from playing with it, etc


Weekly schedule timer

The ON/OFF setting can be set for 4 times a day. Two weekly patterns can be set to match the cooling and heating seasons.

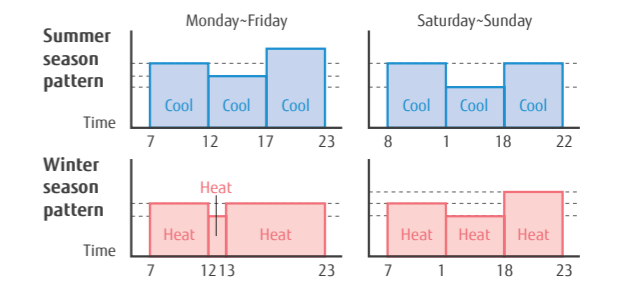

Low noise operation


Users can choose from 4 low noise levels, depending on the installation environment. The operation time can be set using the timer.

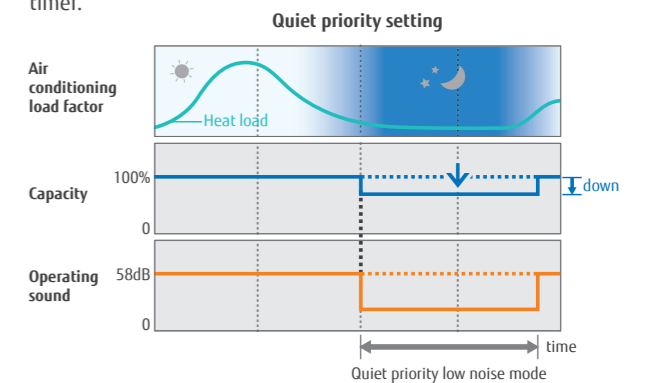

# Flexible Design & Easy Installation


## Large capacity connection

Up to 8 indoor units can be connected to one outdoor unit. A maximum of 130% indoor unit connectable capacity. Match any room layout

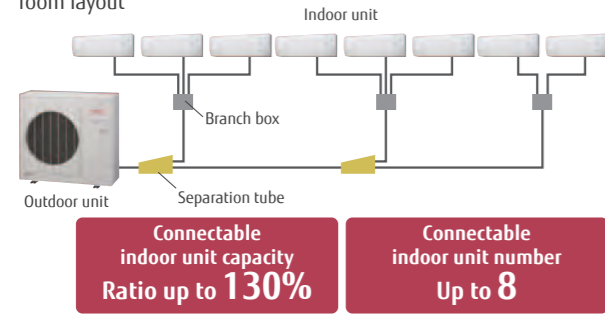


## Long piping design

Can be installed in high rise condominium or commercial building



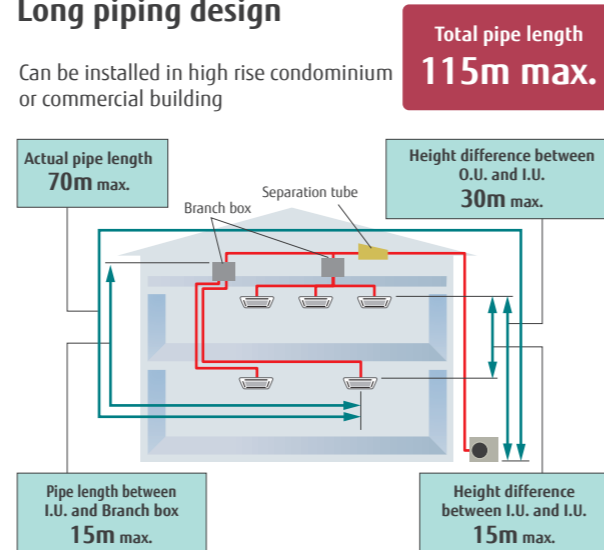


All flare piping connection and simple installation that minimizes wiring mistakes.

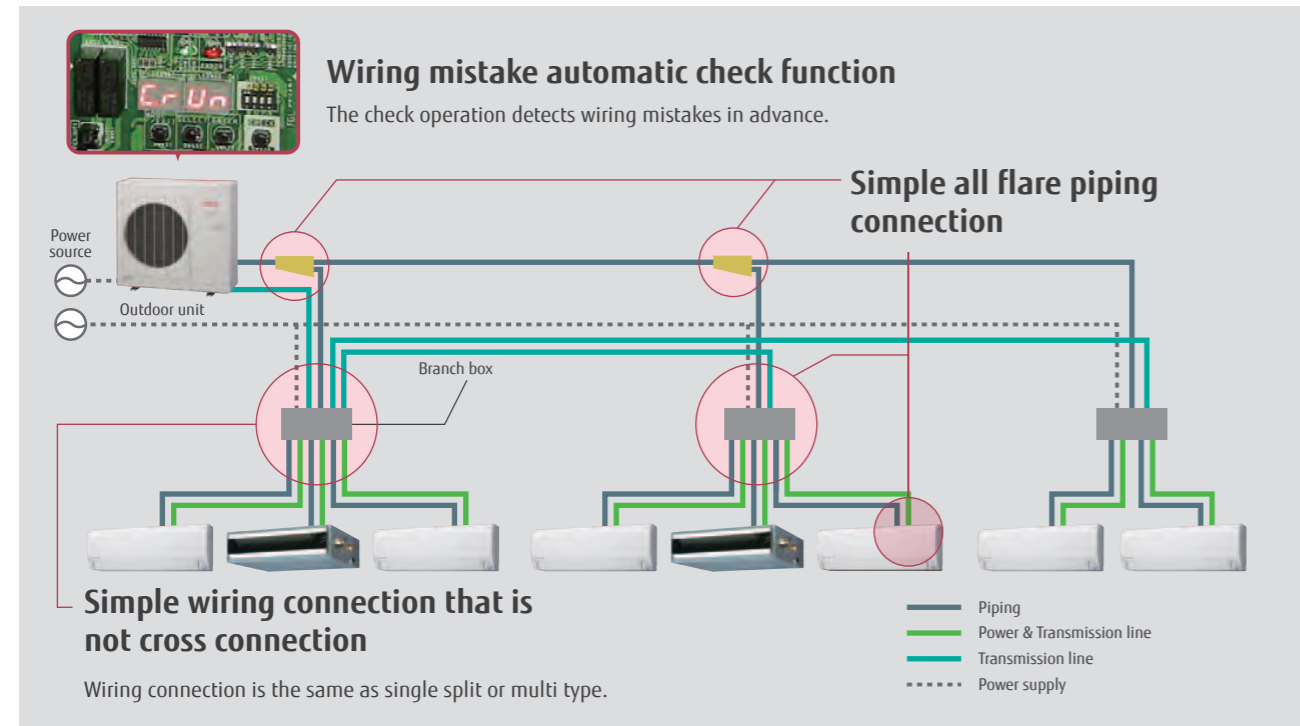

## Branch Box can be mounted flexibly.


### Allowed Branch Box Mounting Direction

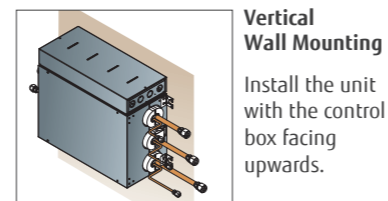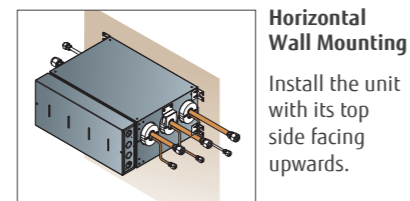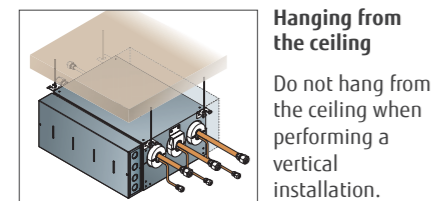


# Outdoor unit Dimensions

## Dimensions


Outdoor Unit  
AOYG45LBT8

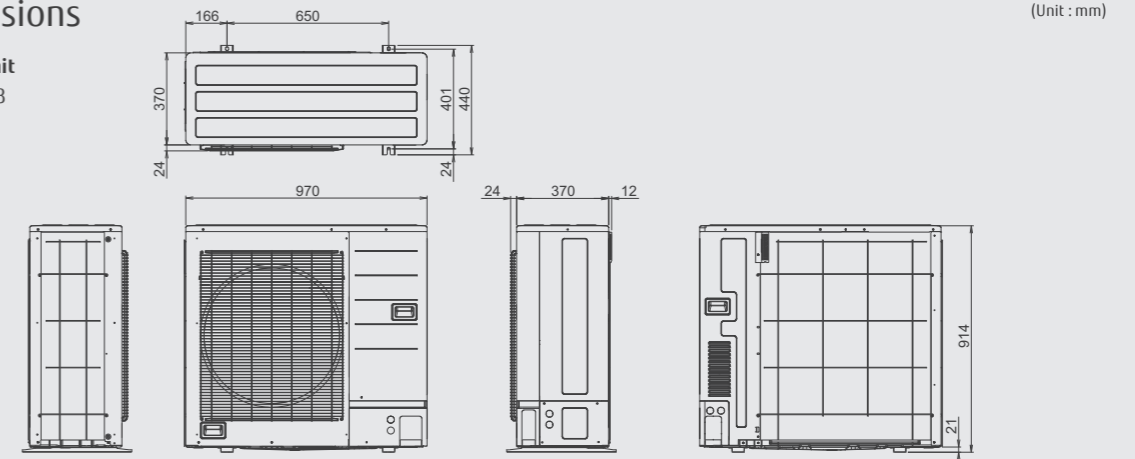

Branch Box  
UTP-PY03A  
(3 branches type)

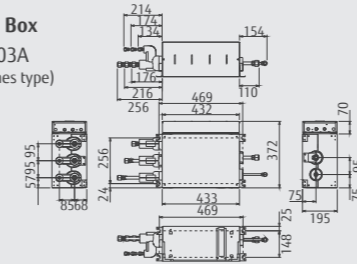

Branch Box  
UTP-PY02A  
(2 branches type)

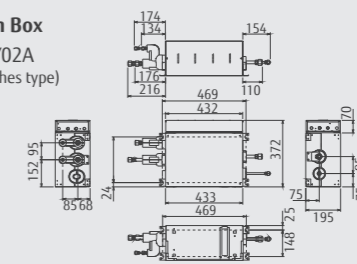

## Specifications

Model name	AOYG45LBT8		
Maximum Connectable Indoor Unit	8		
Indoor unit connectable capacity	Cooling	kW	11.2 - 18.2
Power source	V/Ø/Hz		
	230/1/50		
Rated Capacity	Cooling	kW	14.0
	Heating	kW	16.0
Input Power	Cooling	kW	5.20
	Heating	kW	5.07
Air flow rate	Cooling	m <sup>3</sup> /h	4,650
	Heating	m <sup>3</sup> /h	4,800
Sound pressure level	Cooling	dB(A)	56
	Heating	dB(A)	58
Heat exchanger fin	Plate fin coil		
Net Dimensions H x W x D	mm		
	914 x 970 x 370		
Weight	kg(lbs)		
	98 (217)		
Piping Connections (Small / Large)	mm		
	9.52/15.88		
Max Pipe Length	m		
	115 (Total)		
Max Height Difference (O.U ~ I.U)	m		
	30		
Operating range	Cooling	°CDB	-5 to 46
	Heating	°CDB	-15 to 24
Refrigerant	R410A		

Model name	UTP-PY03A	UTP-PY02A	
Connectable indoor unit	1 to 3 Units	1 to 2 Units	
Power source	1Ø 230V -50Hz		
Available voltage range	198-264V	198-264V	
Power consumption	W	10	
Running current	A	0.05	
Dimensions (HxWxD)	mm	195x433x370	
Weight	kg	9	
Connection pipe	Size	mm	Main: 9.52x1, Branch:6.35x3
	Method	mm	Main: 15.88x1, Branch:12.7x3
	Flare	Flare	Main: 15.88x1, Branch:12.7x2

Note: Specifications are based on the following conditions. Power source of specifications: 230V.

2 & 3-4 Rooms Multi

Wall Mounted Type

Model No.	Indoor unit	ASAG07LMCA	ASAG09LMCA	ASAG12LMCA	ASYG07LUCA	ASYG09LUCA	ASYG12LUCA
kW Class	kW	2.0	2.5	3.5	2.0	2.5	3.5
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Air Flow	Cooling Heating H/M/L/Q m³/h	560/500/430/310	600/520/430/310	660/560/450/310	570/520/470/330	600/550/470/330	660/600/530/330
Sound pressure level	Cooling Heating H/M/L/Q dB(A)	36/32/29/21	37/33/29/21	40/36/30/21	35/30/28/21	36/32/28/21	37/34/31/21
Net Dimension H × W × D	mm	268x840x203	268x840x203	268x840x203	282x870x185	282x870x185	282x870x185
Weight	kg(lbs)	8.5(18.7)	8.5(18.7)	8.5(18.7)	9.5(20.9)	9.5(20.9)	9.5(20.9)
Piping Connections	Liquid/Gas mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52

Wall Mounted Type

Model No.	Indoor unit	ASAG18LFCA	ASAG24LFCA
kW Class	kW	5.0	7.0
Power Source	V/Ø/Hz	230/1/50	230/1/50
Air Flow	Cooling Heating H/M/L/Q m³/h	900/740/620/550	1120/900/740/620
Sound pressure level	Cooling Heating H/M/L/Q dB(A)	43/37/33/26	49/42/37/33
Net Dimension H × W × D	mm	320x998x238	320x998x238
Weight	kg(lbs)	14(30.9)	14(30.9)
Piping Connections	Liquid/Gas mm	Ø6.35/Ø12.7	Ø6.35/Ø15.88

Compact Cassette Type

Model No.	Indoor unit	AUAG09LVLA	AUAG12LVLA	AUAG14LVLA	AUAG18LVLA
kW Class	kW	2.5	3.5	4.0	5.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Air Flow	Cooling Heating H/M/L/Q m³/h	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
Sound pressure level	Cooling Heating H/M/L/Q dB(A)	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
Net Dimension H × W × D	mm	245x570x570	245x570x570	245x570x570	245x570x570
Weight	kg(lbs)	15(33.1)	15(33.1)	15(33.1)	15(33.1)
Panel		UTG-UFYD-W			
Piping Connections	Liquid/Gas mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7

Slim Duct Type

Model No.	Indoor unit	ARAG09LLLLA	ARAG12LLLLA	ARAG14LLLLA	ARAG18LLLLA	ARAG24LLLLA
kW Class	kW	2.5	3.5	4.0	5.0	7.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Air Flow	Cooling Heating H/M/L/Q m³/h	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750	1330/1240/1100/1030
Sound pressure level	Cooling Heating H/M/L/Q dB(A)	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29	33/32/30/29
Net Dimension H × W × D	mm	198x700x620	198x700x620	198x700x620	198x900x620	198x1100x620
Weight	kg(lbs)	19(41.9)	19(41.9)	19(41.9)	23(50.7)	27(59.5)
Piping Connections	Liquid/Gas mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7	Ø6.35/Ø15.88
External static pressure		0 to 90				0 to 50
Drain pump		Standard				

8 Rooms Multi

Compact wall mounted

Model No.	Indoor unit	ASYG07LUCA	ASYG09LUCA	ASYG12LUCA	ASYG14LUCA
kW Class	kW	2.0	2.5	3.5	4.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling Heating H/M/L/Q dB(A)	35/30/28/21	36/32/28/21	37/34/31/21	41/36/31/25
Sound Power Level	Cooling Heating H dB(A)	53	54	55	59
Air Flow	Cooling Heating H/M/L/Q m³/h	570/520/470/330	600/550/470/330	660/600/530/330	710/640/570/390
Net Dimension	mm	282x870x185	282x870x185	282x870x185	282x870x185
Weight	kg(lbs)	9.5(21)	9.5(21)	9.5(21)	9.5(21)
Pipe Size	Liquid/Gas mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7

Wall mounted

Model No.	Indoor unit	ASYG07LMCA	ASYG09LMCA	ASYG12LMCA	ASYG14LMCA	ASYG18LFCA	ASYG24LFCC
kW Class	kW	2.0	2.5	3.5	4.0	5.0	7.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling Heating H/M/L/Q dB(A)	36/32/29/22	37/33/29/22	40/36/30/21	42/38/33/25	43/37/33/26	49/42/37/33
Sound Power Level	Cooling Heating H dB(A)	51	52	54	56	58	64
Air Flow	Cooling Heating H/M/L/Q m³/h	560/500/430/310	600/520/430/310	660/560/450/310	730/600/530/360	900/740/620/550	1120/900/740/620
Net Dimension	mm	268x840x203	268x840x203	268x840x203	268x840x203	320x998x238	320x998x238
Weight	kg(lbs)	8.5(19)	8.5(19)	8.5(19)	8.5(19)	14(30.8)	14(30.8)
Pipe Size	Liquid/Gas mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7	Ø6.35/Ø15.88

Floor

Model No.	Indoor unit	AGYG09LVCA	AGYG12LVCA	AGYG14LVCA
kW Class	kW	2.5	3.5	4.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling Heating H/M/L/Q dB(A)	39/34/28/22	42/36/30/22	44/38/31/22
Sound Power Level	Cooling Heating H dB(A)	52	55	56
Air Flow	Cooling Heating H/M/L/Q m³/h	530/440/360/270	600/490/380/270	650/520/400/270
Net Dimension	mm	530/460/380/270	600/510/410/270	650/540/430/270
Weight	kg(lbs)	14(30.7)	14(30.7)	14(30.7)
Pipe Size	Liquid/Gas mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7

Floor ceiling

Model No.	Indoor unit	ABYG14LVTA	ABYG18LVTB
kW Class	kW	4.0	5.0
Power Source	V/Ø/Hz	230/1/50	230/1/50
Sound Pressure Level	Cooling Heating H/M/L/Q dB(A)	36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)
Sound Power Level	Cooling Heating H dB(A)	51	55
Air Flow	Cooling Heating H/M/L/Q m³/h	640/590/540/480	780/700/560/500
Net Dimension	mm	640/590/540/480	780/700/560/500
Weight	kg(lbs)	199x990x655	199x990x655
Pipe Size	Liquid/Gas mm	27(60)	27(60)

Compact cassette

Model No.	Indoor unit	AUYG07LVLA	AUYG09LVLA	AUYG12LVLB	AUYG14LVLB	AUYG18LVLB
kW Class	kW	2.0	2.5	3.5	4.0	5.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling Heating H/M/L/Q dB(A)	33/31/29/27	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
Sound Power Level	Cooling Heating H dB(A)	46	46	49	52	54
Air Flow	Cooling Heating H/M/L/Q m³/h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
Net Dimension	mm	540/490/440/390	540/490/440/390	610/530/470/410	700/620/550/430	800/710/600/450
Weight	kg(lbs)	245x570x570	245x570x570	245x570x570	245x570x570	245x570x570
Cassette Grille		UTG-UFYD-W				
Pipe Size	Liquid/Gas mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7

Slim duct

Model No.	Indoor unit	ARYG07LLTA	ARYG09LLTA	ARYG12LLTB	ARYG14LLTB	ARYG18LLTB
kW Class	kW	2.0	2.5	3.5	4.0	5.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling Heating H/M/L/Q dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29
Sound Power Level	Cooling Heating H dB(A)	57	57	58	60	58
Air Flow	Cooling Heating H/M/L/Q m³/h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimension	mm	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Weight	kg(lbs)	198x700x620	198x700x620	198x700x620	198x700x620	23(50.6)
Pipe Size	Liquid/Gas mm	17(37.5)	19(41.8)	19(41.8)	19(41.8)	23(50.6)
External static pressure		0 to 90				
Drain pump		Standard				

2 Rooms Multi cooling

AOAG14LAC2	Combination of indoor unit			COOLING OPERATION				
				Cooling Capacity			Input Power (min-max)	COP (W/W)
	Room 1	Room 2	Total Capacity (min-max)	KW	KW	KW		
	Room 1	Room 2	Total				KW	KW
1 Room	7	-	7	2.10	-	2.10(1.20-2.70)	0.59(0.30-0.76)	3.56
	9	-	9	2.50	-	2.50(1.20-3.20)	0.65(0.30-1.03)	3.85
	12	-	12	3.50	-	3.50(1.20-3.70)	1.01(0.30-1.21)	3.47
2 Room	7	7	14	2.00	2.00	4.00(1.40-4.40)	1.06(0.35-1.40)	3.77
	7	9	16	1.95	2.05	4.00(1.40-4.40)	1.06(0.35-1.40)	3.77
	7	12	19	1.65	2.35	4.00(1.40-4.60)	1.02(0.35-1.47)	3.92
	9	9	18	2.00	2.00	4.00(1.40-4.50)	1.06(0.35-1.43)	3.77
	9	12	21	1.70	2.30	4.00(1.40-4.70)	1.02(0.35-1.47)	3.92

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models  
 •Connectable indoor units are only wall mounted type.  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).  
 •Pipe Length: 5m, Height difference: 0m (Outdoor unit to Indoor unit)  
 •The Total ability of connected a indoor unit is up to 21000Btu from 14000Btu.

ADAG18LAC2	Combination of indoor unit			COOLING OPERATION				
				Cooling Capacity			Input Power (min-max)	COP (W/W)
	Room 1	Room 2	Total Capacity (min-max)	KW	KW	KW		
	Room 1	Room 2	Total				KW	KW
1 Room	7	-	7	2.10	-	2.10(1.40-2.70)	0.48(0.30-0.72)	4.38
	9	-	9	2.50	-	2.50(1.40-3.20)	0.64(0.30-1.05)	3.94
	12	-	12	3.50	-	3.50(1.40-3.70)	1.02(0.30-1.34)	3.43
2 Room	7	7	14	2.10	2.10	4.20(1.70-5.20)	1.24(0.35-1.68)	3.39
	7	9	16	2.10	2.50	4.60(1.70-5.30)	1.26(0.35-1.79)	3.65
	7	12	19	1.90	3.10	5.00(1.70-5.60)	1.48(0.35-1.95)	3.38
	9	9	18	2.50	2.50	5.00(1.70-5.60)	1.49(0.35-1.95)	3.36
	9	12	21	2.10	2.90	5.00(1.70-5.70)	1.48(0.35-1.95)	3.38
	12	12	24	2.50	2.50	5.00(1.70-5.80)	1.49(0.35-1.99)	3.36

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).  
 •Pipe Length: 5m, Height difference: 0m (Outdoor unit to Indoor unit)  
 •The Total ability of connected a indoor unit is up to 24000Btu from 14000Btu.

3 Rooms Multi cooling

AOAG20LBT3	Combination of indoor unit				COOLING OPERATION					
					Cooling Capacity				Input Power (min-max)	COP (W/W)
	Room 1	Room 2	Room 3	Total (min-max)	KW	KW	KW			
	Room 1	Room 2	Room 3	Total				KW	KW	KW
1 Room	7	-	-	7	2.30	-	-	2.3(1.5-2.7)	0.65(0.45-0.75)	3.54
	9	-	-	9	2.70	-	-	2.7(1.5-3.3)	0.80(0.45-1.09)	3.38
	12	-	-	12	3.50	-	-	3.5(1.5-3.7)	1.09(0.45-1.15)	3.21
	14	-	-	14	4.20	-	-	4.2(1.5-4.8)	1.16(0.45-1.41)	3.62
	18	-	-	18	5.00	-	-	5.0(1.8-5.6)	1.50(0.50-1.96)	3.33
2 Room	7	7	-	14	2.30	2.30	-	4.6(1.8-5.0)	1.20(0.50-1.40)	3.83
	7	9	-	16	2.30	2.70	-	5.0(1.8-5.7)	1.36(0.50-1.78)	3.68
	7	12	-	19	2.34	3.36	-	5.7(1.8-6.1)	1.65(0.50-1.97)	3.45
	7	14	-	21	2.08	3.62	-	5.7(1.8-7.2)	1.55(0.50-2.46)	3.68
	7	18	-	25	1.80	3.90	-	5.7(1.8-7.8)	1.51(0.50-2.87)	3.77
	9	9	-	18	2.75	2.75	-	5.5(1.8-6.2)	1.55(0.50-2.02)	3.55
	9	12	-	21	2.57	3.14	-	5.7(1.8-6.8)	1.65(0.50-2.45)	3.46
	9	14	-	23	2.30	3.40	-	5.7(1.8-7.7)	1.50(0.50-2.77)	3.80
	9	18	-	27	2.00	3.70	-	5.7(1.8-7.9)	1.46(0.50-2.87)	3.90
	12	12	-	24	2.85	2.85	-	5.7(1.8-7.2)	1.62(0.50-2.74)	3.52
	12	14	-	26	2.58	3.12	-	5.7(1.8-7.8)	1.46(0.50-2.87)	3.90
	3 Room	12	18	-	30	2.27	3.43	-	5.7(1.8-7.9)	1.46(0.50-2.87)
7		7	7	21	1.90	1.90	1.90	5.7(1.8-7.4)	1.40(0.50-2.37)	4.07
7		7	9	23	1.80	1.80	2.11	5.7(1.8-7.8)	1.40(0.50-2.60)	4.07
7		7	12	26	1.66	1.66	2.38	5.7(1.8-8.1)	1.40(0.50-2.87)	4.07
7		7	14	28	1.52	1.52	2.65	5.7(2.0-8.4)	1.40(0.60-2.87)	4.07
7		7	18	32	1.37	1.37	2.97	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
7		9	9	25	1.70	2.00	2.00	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
7		9	12	28	1.58	1.85	2.27	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
7		9	14	30	1.46	1.71	2.53	5.7(2.0-8.4)	1.40(0.60-2.87)	4.07
7		9	18	34	1.31	1.54	2.85	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
7		12	12	31	1.47	2.11	2.11	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
7		12	14	33	1.37	1.96	2.38	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
9		9	9	27	1.90	1.90	1.90	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
9		9	12	30	1.77	1.77	2.16	5.7(1.8-8.3)	1.40(0.50-2.87)	4.07
9		9	14	32	1.64	1.64	2.43	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
9		9	18	36*1	1.48	1.48	2.74	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
9		12	12	33	1.65	2.02	2.02	5.7(1.8-8.3)	1.40(0.50-2.87)	4.07
9		12	14	35	1.54	1.88	2.28	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
12		12	12	36	1.90	1.90	1.90	5.7(1.8-8.3)	1.40(0.50-2.87)	4.07

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Cooling: Indoor temperature of 27 °CDB/19 °CWB and outdoor temperature of 35°CDB.  
 •Pipe length: 5m, Height difference: 0m (Outdoor unit - Indoor unit)  
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.  
 \*1: When ASAG18LFCA is connected, 9,000Btu model shall be chosen at least one "Compact wall mounted type" or more.

ADAG24LAT3	Combination of indoor unit				COOLING OPERATION					
					Cooling Capacity				Input Power (min-max)	COP (W/W)
	Room 1	Room 2	Room 3	Total (min-max)	KW	KW	KW			
	Room 1	Room 2	Room 3	Total				KW	KW	KW
1 Room	7	-	-	7	2.30	-	-	2.3(1.5-2.7)	0.65(0.45-0.75)	3.54
	9	-	-	9	2.70	-	-	2.7(1.5-3.3)	0.80(0.45-1.09)	3.38
	12	-	-	12	3.50	-	-	3.5(1.5-3.7)	1.09(0.45-1.15)	3.21
	14	-	-	14	4.20	-	-	4.2(1.5-4.8)	1.16(0.45-1.41)	3.62
	18	-	-	18	5.00	-	-	5.0(1.8-5.6)	1.50(0.50-1.96)	3.33
2 Room	7	7	-	14	2.30	2.30	-	4.6(1.8-5.0)	1.20(0.50-1.40)	3.83
	7	9	-	16	2.30	2.70	-	5.0(1.8-5.7)	1.36(0.50-1.78)	3.68
	7	12	-	19	2.38	3.42	-	5.8(1.8-6.1)	1.70(0.50-1.97)	3.41
	7	14	-	21	2.37	4.13	-	6.5(1.8-7.2)	1.91(0.50-2.46)	3.40
	7	18	-	25	2.08	4.52	-	6.6(1.8-7.8)	1.91(0.50-2.87)	3.46
	9	9	-	18	2.75	2.75	-	5.5(1.8-6.2)	1.55(0.50-2.02)	3.55
	9	12	-	21	2.79	3.41	-	6.2(1.8-6.8)	1.90(0.50-2.45)	3.26
	9	14	-	23	2.66	3.94	-	6.6(1.8-7.7)	1.91(0.50-2.77)	3.46
	9	18	-	27	2.35	4.35	-	6.7(1.8-7.9)	1.91(0.50-2.87)	3.51
	12	12	-	24	3.15	3.15	-	6.3(1.8-7.2)	1.90(0.50-2.74)	3.32
	12	14	-	26	3.03	3.67	-	6.7(1.8-7.8)	1.91(0.50-2.87)	3.51
	3 Room	12	18	-	30	2.66	4.04	-	6.7(1.8-7.9)	1.92(0.50-2.87)
7		7	7	21	2.27	2.27	2.27	6.8(1.8-7.4)	1.92(0.50-2.37)	3.54
7		7	9	23	2.14	2.14	2.52	6.8(1.8-7.8)	1.93(0.50-2.60)	3.52
7		7	12	26	1.98	1.98	2.84	6.8(1.8-8.1)	1.93(0.50-2.87)	3.52
7		7	14	28	1.82	1.82	3.16	6.8(2.0-8.4)	1.94(0.60-2.87)	3.51
7		7	18	32	1.63	1.63	3.54	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
7		9	9	25	2.03	2.38	2.38	6.8(1.8-8.2)	1.93(0.50-2.87)	3.52
7		9	12	28	1.88	2.21	2.70	6.8(1.8-8.2)	1.93(0.50-2.87)	3.52
7		9	14	30	1.74	2.04	3.02	6.8(2.0-8.4)	1.94(0.60-2.87)	3.51
7		9	18	34	1.56	1.84	3.40	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
7		12	12	31	1.76	2.52	2.52	6.8(1.8-8.2)	1.94(0.50-2.87)	3.51
7		12	14	33	1.63	2.34	2.83	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
9		9	9	27	2.27	2.27	2.27	6.8(1.8-8.2)	1.94(0.50-2.87)	3.51
9		9	12	30	2.11	2.11	2.58	6.8(1.8-8.3)	1.94(0.50-2.87)	3.51
9		9	14	32	1.95	1.95	2.89	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
9		9	18	36*1	1.77	1.77	3.27	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
9		12	12	33	1.97	2.41	2.41	6.8(1.8-8.3)	1.94(0.50-2.87)	3.51
9		12	14	35	1.84	2.24	2.72	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
12		12	12	36	2.27	2.27	2.27	6.8(1.8-8.3)	1.94(0.50-2.87)	3.51

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Cooling: Indoor temperature of 27 °CDB/19 °CWB and outdoor temperature of 35°CDB.  
 •Pipe length: 5m, Height difference: 0m (Outdoor unit - Indoor unit)  
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.  
 \*1: When ASAG18LFCA is connected, 9,000Btu model shall be chosen at least one "Compact wall mounted type" or more.

2 Rooms Multi heating

AOAG14LAC2	Combination of indoor unit			HEATING OPERATION				
				Heating Capacity			Input Power (min-max)	COP (W/W)
				Room 1	Room 2	Total Capacity (min-max)		
Room 1	Room 2	Total	KW	KW	KW	KW	KW	
1 Room	7	-	7	2.70	-	2.70(0.90-3.30)	0.64(0.25-0.89)	4.22
	9	-	9	3.30	-	3.30(0.90-4.20)	0.87(0.25-1.37)	3.79
	12	-	12	4.00	-	4.00(0.90-4.80)	1.13(0.25-1.59)	3.54
2 Room	7	7	14	2.20	2.20	4.40(1.10-5.40)	1.03(0.25-1.78)	4.27
	7	9	16	2.15	2.25	4.40(1.10-5.40)	1.03(0.25-1.78)	4.27
	7	12	19	1.95	2.45	4.40(1.10-5.50)	1.02(0.25-1.76)	4.31
	9	9	18	2.20	2.20	4.40(1.10-5.40)	1.03(0.25-1.78)	4.27
	9	12	21	2.00	2.40	4.40(1.10-5.50)	1.02(0.25-1.76)	4.31

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models  
 •Connectable indoor units are only wall mounted type.  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Heating capacity is based on 20°CDB (indoor temperature), 7°CDB / 6°CWB (outdoor temperature).  
 •Pipe Length: 5m, Height difference: 0m (Outdoor unit to Indoor unit)  
 •The Total ability of connected a indoor unit is up to 21000Btu from 14000Btu.

AOAG18LAC2	Combination of indoor unit			HEATING OPERATION				
				Heating Capacity			Input Power (min-max)	COP (W/W)
				Room 1	Room 2	Total Capacity (min-max)		
Room 1	Room 2	Total	KW	KW	KW	KW	KW	
1 Room	7	-	7	2.70	-	2.70(1.40-3.30)	0.48(0.30-0.72)	4.38
	9	-	9	3.30	-	3.30(1.40-4.20)	0.64(0.30-1.05)	3.94
	12	-	12	4.00	-	4.00(1.40-4.80)	1.02(0.30-1.34)	3.43
2 Room	7	7	14	2.70	2.70	5.40(1.80-6.00)	1.24(0.35-1.68)	3.39
	7	9	16	2.50	3.00	5.50(1.80-6.00)	1.26(0.35-1.79)	3.65
	7	12	19	2.30	3.30	5.60(1.80-6.10)	1.48(0.35-1.95)	3.38
	9	9	18	2.80	2.80	5.60(1.80-6.10)	1.49(0.35-1.95)	3.36
	9	12	21	2.45	3.15	5.60(1.80-6.20)	1.48(0.35-1.95)	3.38
	12	12	24	2.80	2.80	5.60(1.80-6.30)	1.49(0.35-1.99)	3.36

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Heating capacity is based on 20°CDB (indoor temperature), 7°CDB / 6°CWB (outdoor temperature).  
 •Pipe Length: 5m, Height difference: 0m (Outdoor unit to Indoor unit)  
 •The Total ability of connected a indoor unit is up to 24000Btu from 14000Btu.

3 Rooms Multi heating

AOAG20LBT3	Combination of indoor unit				HEATING OPERATION					
					Heating Capacity				Input Power (min-max)	COP (W/W)
					Room 1	Room 2	Room 3	Total (min-max)		
Room 1	Room 2	Room 3	Total	KW	KW	KW	KW	KW		
1 Room	7	-	-	7	2.70	-	-	2.7(1.5-3.3)	0.83(0.43-1.00)	3.25
	9	-	-	9	3.30	-	-	3.3(1.5-4.2)	1.00(0.42-1.30)	3.30
	12	-	-	12	3.80	-	-	3.8(1.5-4.8)	1.26(0.42-1.62)	3.02
	14	-	-	14	4.80	-	-	4.8(1.5-5.8)	1.30(0.42-1.70)	3.69
	18	-	-	18	6.00	-	-	6.0(1.6-7.1)	1.85(0.42-2.40)	3.24
2 Room	7	7	-	14	2.75	2.75	-	5.5(2.0-6.1)	1.55(0.52-1.93)	3.55
	7	9	-	16	2.80	3.30	-	6.1(2.0-7.0)	1.82(0.52-2.52)	3.35
	7	12	-	19	2.88	4.12	-	7.0(2.0-7.3)	2.31(0.52-2.66)	3.03
	7	14	-	21	2.80	4.80	-	7.6(2.0-8.3)	2.28(0.50-2.87)	3.33
	7	18	-	25	2.48	5.32	-	7.8(2.0-8.3)	2.29(0.50-2.87)	3.41
	9	9	-	18	3.30	3.30	-	6.6(2.0-7.4)	2.04(0.52-2.68)	3.24
	9	12	-	21	3.30	4.00	-	7.3(2.0-7.7)	2.43(0.52-2.87)	3.00
	9	14	-	23	3.18	4.62	-	7.8(2.0-8.3)	2.33(0.50-2.87)	3.35
	9	18	-	27	2.77	5.03	-	7.8(2.0-8.5)	2.22(0.50-2.87)	3.52
	12	12	-	24	3.80	3.80	-	7.6(2.0-7.8)	2.54(0.52-2.87)	2.99
	12	14	-	26	3.55	4.25	-	7.8(2.0-8.4)	2.32(0.50-2.87)	3.37
	3 Room	12	18	-	30	3.12	4.68	-	7.8(2.0-8.6)	2.21(0.50-2.87)
7		7	7	21	2.60	2.60	2.60	7.8(2.0-8.6)	2.22(0.50-2.68)	3.51
7		7	9	23	2.45	2.45	2.89	7.8(2.0-8.8)	2.15(0.50-2.87)	3.62
7		7	12	26	2.28	2.28	3.25	7.8(2.0-8.9)	2.10(0.50-2.80)	3.71
7		7	14	28	2.10	2.10	3.60	7.8(2.0-9.2)	1.98(0.50-2.72)	3.94
7		7	18	32	1.88	1.88	4.03	7.8(2.0-9.2)	1.96(0.50-2.70)	3.97
7		9	9	25	2.32	2.74	2.74	7.8(2.0-9.0)	2.10(0.50-2.87)	3.71
7		9	12	28	2.16	2.55	3.09	7.8(2.0-9.1)	2.09(0.50-2.87)	3.73
7		9	14	30	2.00	2.36	3.43	7.8(2.0-9.2)	1.95(0.50-2.72)	4.01
7		9	18	34	1.80	2.13	3.87	7.8(2.0-9.2)	1.93(0.50-2.69)	4.05
7		12	12	31	2.02	2.89	2.89	7.8(2.0-9.1)	2.04(0.50-2.87)	3.82
7		12	14	33	1.88	2.69	3.23	7.8(2.0-9.2)	1.94(0.50-2.70)	4.03
9		9	9	27	2.60	2.60	2.60	7.8(2.0-9.1)	2.05(0.50-2.87)	3.80
9		9	12	30	2.43	2.43	2.94	7.8(2.0-9.2)	2.04(0.50-2.87)	3.82
9		9	14	32	2.26	2.26	3.28	7.8(2.0-9.2)	1.93(0.50-2.70)	4.05
9		9	18	36*1	2.04	2.04	3.71	7.8(2.0-9.2)	1.91(0.50-2.68)	4.09
9		12	12	33	2.28	2.76	2.76	7.8(2.0-9.2)	1.99(0.50-2.80)	3.91
9		12	14	35	2.13	2.58	3.09	7.8(2.0-9.2)	1.93(0.50-2.69)	4.05
12		12	12	36	2.60	2.60	2.60	7.8(2.0-9.2)	1.98(0.50-2.78)	3.93

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Cooling: Indoor temperature of 27 °CDB/19 °CWB and outdoor temperature of 35°CDB.  
 •Pipe length: 5m, Height difference: 0m (Outdoor unit - Indoor unit)  
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.  
 \*1: When ASAG18LFCA is connected, 9,000Btu model shall be chosen at least one "Compact wall mounted type" or more.

AOAG24LAT3	Combination of indoor unit				HEATING OPERATION					
					Heating Capacity				Input Power (min-max)	COP (W/W)
					Room 1	Room 2	Room 3	Total (min-max)		
Room 1	Room 2	Room 3	Total	KW	KW	KW	KW	KW		
1 Room	7	-	-	7	2.70	-	-	2.7(1.5-3.3)	0.83(0.43-1.00)	3.25
	9	-	-	9	3.30	-	-	3.3(1.5-4.2)	1.00(0.42-1.30)	3.30
	12	-	-	12	3.80	-	-	3.8(1.5-4.8)	1.26(0.42-1.62)	3.02
	14	-	-	14	4.80	-	-	4.8(1.5-5.8)	1.30(0.42-1.70)	3.69
	18	-	-	18	6.00	-	-	6.0(1.6-7.1)	1.85(0.42-2.40)	3.24
2 Room	7	7	-	14	2.75	2.75	-	5.5(2.0-6.1)	1.55(0.52-1.93)	3.55
	7	9	-	16	2.80	3.30	-	6.1(2.0-7.0)	1.82(0.52-2.52)	3.35
	7	12	-	19	2.88	4.12	-	7.0(2.0-7.3)	2.31(0.52-2.66)	3.03
	7	14	-	21	2.80	4.80	-	7.6(2.0-8.3)	2.28(0.50-2.87)	3.33
	7	18	-	25	2.51	5.39	-	7.9(2.0-8.3)	2.34(0.50-2.87)	3.38
	9	9	-	18	3.30	3.30	-	6.6(2.0-7.4)	2.04(0.52-2.68)	3.24
	9	12	-	21	3.30	4.00	-	7.3(2.0-7.7)	2.43(0.52-2.87)	3.00
	9	14	-	23	3.22	4.68	-	7.9(2.0-8.3)	2.38(0.50-2.87)	3.32
	9	18	-	27	2.84	5.16	-	8.0(2.0-8.5)	2.32(0.50-2.87)	3.45
	12	12	-	24	3.80	3.80	-	7.6(2.0-7.8)	2.54(0.52-2.87)	2.99
	12	14	-	26	3.59	4.31	-	7.9(2.0-8.4)	2.37(0.50-2.87)	3.33
	3 Room	12	18	-	30	3.20	4.80	-	8.0(2.0-8.6)	2.31(0.50-2.87)
7		7	7	21	2.47	2.47	2.47	7.4(2.0-8.6)	2.05(0.50-2.68)	3.61
7		7	9	23	2.42	2.42	2.86	7.7(2.0-8.8)	2.11(0.50-2.87)	3.65
7		7	12	26	2.28	2.28	3.25	7.8(2.0-8.9)	2.10(0.50-2.80)	3.71
7		7	14	28	2.13	2.13	3.65	7.9(2.0-9.2)	2.02(0.50-2.72)	3.91
7		7	18	32	1.91	1.91	4.09	7.9(2.0-9.2)	2.00(0.50-2.70)	3.95
7		9	9	25	2.32	2.74	2.74	7.8(2.0-9.0)	2.10(0.50-2.87)	3.71
7		9	12	28	2.16	2.55	3.09	7.8(2.0-9.1)	2.09(0.50-2.87)	3.73
7		9	14	30	2.06	2.42	3.52	8.0(2.0-9.2)	2.02(0.50-2.72)	3.96
7		9	18	34	1.85	2.18	3.97	8.0(2.0-9.2)	2.00(0.50-2.69)	4.00
7		12	12	31	2.05	2.93	2.93	7.9(2.0-9.1)	2.08(0.50-2.87)	3.80
7		12	14	33	1.93	2.76	3.31	8.0(2.0-9.2)	2.01(0.50-2.70)	3.98
9		9	9	27	2.63	2.63	2.63	7.9(2.0-9.1)	2.09(0.50-2.87)	3.78
9		9	12	30	2.46	2.46	2.98	7.9(2.0-9.2)	2.08(0.50-2.87)	3.80
9		9	14	32	2.32	2.32	3.37	8.0(2.0-9.2)	2.00(0.50-2.70)	4.00
9		9	18	36*1	2.10	2.10	3.81	8.0(2.0-9.2)	1.98(0.50-2.68)	4.04
9		12	12	33	2.34	2.83	2.83	8.0(2.0-9.2)	2.07(0.50-2.80)	3.86
9		12	14	35	2.18	2.64	3.17	8.0(2.0-9.2)	2.00(0.50-2.69)	4.00
12		12	12	36	2.67	2.67	2.67	8.0(2.0-9.2)	2.06(0.50-2.78)	3.88

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h  
 •Operating data under running indoor units are shown on the above table.  
 •2 or more indoor units should be connected.  
 •Heating: Indoor temperature of 20 °CDB, and outdoor temperature of 7°CDB/6°CWB.  
 •Pipe length: 5m, Height difference: 0m (Outdoor unit - Indoor unit)  
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.  
 \*1: When ASAG18LFCA is connected, 9,000Btu model shall be chosen at least one "Compact wall mounted type" or more.

INVERTER

MULTI COMBINATION TABLE

4 Rooms Multi cooling

Table for 4 Rooms Multi cooling. Columns include AOAG30LAT4, Combination of indoor unit (Room 1-4, Total), Cooling Operation (Room 1-4, Total Capacity, Input Power, COP), and AOAG30LAT4.

Note: \*7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models. \*Operating data under running indoor units are shown on the above table. \*3 or more indoor units should be connected. \*Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature). \*Pipe Length: 5m, Height difference: 0m (Outdoor unit to Indoor unit). \*The Total ability of connected a indoor unit is up to 49000Btu from 27000Btu. \*1: Connection of ASAG18L + ARAG09L + ARAG09L + ARAG09L is not available. All types other than this combination can be connected. \*2: Connection of ASAG18L + ARAG12L + ARAG09L + ARAG09L is not available. All types other than this combination can be connected.

4 Rooms Multi heating

Table for 4 Rooms Multi heating. Columns include AOAG30LAT4, Combination of indoor unit (Room 1-4, Total), Heating Operation (Room 1-4, Total Capacity, Input Power, COP), and AOAG30LAT4.

Note: \*7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h / 18:18000Btu/h / 24:24000Btu/h models. \*Operating data under running indoor units are shown on the above table. \*3 or more indoor units should be connected. \*Heating capacity is based on 20°CDB (indoor temperature), 7°CDB / 6°CWB (outdoor temperature). \*Pipe Length: 5m, Height difference: 0m (Outdoor unit to Indoor unit). \*The Total ability of connected a indoor unit is up to 49000Btu from 27000Btu. \*1: Connection of ASAG18L + ARAG09L + ARAG09L + ARAG09L is not available. All types other than this combination can be connected. \*2: Connection of ASAG18L + ARAG12L + ARAG09L + ARAG09L is not available. All types other than this combination can be connected.

8 Rooms Multi cooling

AOYG4SLBT8	Combination of indoor unit								COOLING OPERATION											
									Cooling Capacity										Input power	
									Room 1	Room 2	Room 3	Room 4	Room 5	Room 6	Room 7	Room 8	Total			
2 Room	24	24	-	-	-	-	-	-	7.03	7.03	-	-	-	-	-	-	-	-	14.06	5.20
	18	24	-	-	-	-	-	-	5.27	7.03	-	-	-	-	-	-	-	-	12.30	4.24
	18	18	24	-	-	-	-	-	4.63	4.63	6.18	-	-	-	-	-	-	-	15.45	5.89
	18	18	18	-	-	-	-	-	5.01	5.01	5.01	-	-	-	-	-	-	-	15.03	5.90
	14	24	24	-	-	-	-	-	3.54	6.07	6.07	-	-	-	-	-	-	-	15.68	5.87
	14	18	24	-	-	-	-	-	3.84	4.94	6.59	-	-	-	-	-	-	-	15.37	5.90
	14	18	18	-	-	-	-	-	4.10	5.27	5.27	-	-	-	-	-	-	-	14.64	5.50
	14	14	24	-	-	-	-	-	4.10	4.10	7.03	-	-	-	-	-	-	-	15.23	5.79
	14	14	18	-	-	-	-	-	4.10	4.10	5.27	-	-	-	-	-	-	-	13.47	4.89
	14*1	14*1	14*1	-	-	-	-	-	4.10	4.10	4.10	-	-	-	-	-	-	-	12.30	4.24
	12	24	24	-	-	-	-	-	3.09	6.18	6.18	-	-	-	-	-	-	-	15.45	5.89
	12	18	24	-	-	-	-	-	3.35	5.01	6.68	-	-	-	-	-	-	-	15.04	5.90
12	18	18	-	-	-	-	-	3.52	5.27	5.27	-	-	-	-	-	-	-	14.06	5.20	
12	14	24	-	-	-	-	-	3.52	4.10	7.03	-	-	-	-	-	-	-	14.65	5.50	
12	14	18	-	-	-	-	-	3.52	4.10	5.27	-	-	-	-	-	-	-	12.89	4.57	
12*1	14*1	14*1	-	-	-	-	-	3.52	4.10	4.10	-	-	-	-	-	-	-	11.72	3.91	
12	12	24	-	-	-	-	-	3.52	3.52	7.03	-	-	-	-	-	-	-	14.07	5.20	
12	12	18	-	-	-	-	-	3.52	3.52	5.27	-	-	-	-	-	-	-	12.31	4.24	
9	24	24	-	-	-	-	-	2.46	6.54	6.54	-	-	-	-	-	-	-	15.54	5.90	
9	18	24	-	-	-	-	-	2.64	5.27	7.03	-	-	-	-	-	-	-	14.94	5.65	
9	18	18	-	-	-	-	-	2.64	5.27	5.27	-	-	-	-	-	-	-	13.18	4.73	
9	14	24	-	-	-	-	-	2.64	4.10	7.03	-	-	-	-	-	-	-	13.77	5.05	
9	14	18	-	-	-	-	-	2.64	4.10	5.27	-	-	-	-	-	-	-	12.01	4.08	
9	12	24	-	-	-	-	-	2.64	3.52	7.03	-	-	-	-	-	-	-	13.19	4.73	
9	12	18	-	-	-	-	-	2.64	3.52	5.27	-	-	-	-	-	-	-	11.43	3.74	
9	9	24	-	-	-	-	-	2.64	2.64	7.03	-	-	-	-	-	-	-	12.31	4.24	
7	24	24	-	-	-	-	-	1.93	6.64	6.64	-	-	-	-	-	-	-	15.21	5.90	
7	18	24	-	-	-	-	-	2.05	5.27	7.03	-	-	-	-	-	-	-	14.35	5.35	
7	18	18	-	-	-	-	-	2.05	5.27	5.27	-	-	-	-	-	-	-	12.59	4.41	
7	14	24	-	-	-	-	-	2.05	4.10	7.03	-	-	-	-	-	-	-	13.18	4.73	
7	14	18	-	-	-	-	-	2.05	4.10	5.27	-	-	-	-	-	-	-	11.42	3.74	
7	12	24	-	-	-	-	-	2.05	3.52	7.03	-	-	-	-	-	-	-	12.60	4.41	
7	9	24	-	-	-	-	-	2.05	2.64	7.03	-	-	-	-	-	-	-	11.72	3.91	
14	14	14	18	-	-	-	-	3.60	3.60	3.60	4.63	-	-	-	-	-	-	15.45	5.89	
14	14	14	14	-	-	-	-	3.84	3.84	3.84	3.84	-	-	-	-	-	-	15.37	5.90	
12	14	18	18	-	-	-	-	3.04	3.54	4.55	4.55	-	-	-	-	-	-	15.68	5.87	
12	14	14	18	-	-	-	-	3.15	3.67	3.67	4.72	-	-	-	-	-	-	15.21	5.90	
12	14	14	14	-	-	-	-	3.35	3.90	3.90	3.90	-	-	-	-	-	-	15.04	5.90	
12	12	18	18	-	-	-	-	3.09	3.09	4.63	4.63	-	-	-	-	-	-	15.45	5.89	
12	12	14	24	-	-	-	-	3.04	3.04	3.54	6.07	-	-	-	-	-	-	15.69	5.87	
12	12	14	18	-	-	-	-	3.30	3.30	3.84	4.94	-	-	-	-	-	-	15.38	5.90	
12	12	14	14	-	-	-	-	3.52	3.52	4.10	4.10	-	-	-	-	-	-	15.24	5.79	
12	12	12	24	-	-	-	-	3.09	3.09	3.09	6.18	-	-	-	-	-	-	15.45	5.89	
12	12	12	18	-	-	-	-	3.35	3.35	3.35	5.01	-	-	-	-	-	-	15.05	5.90	
12	12	12	14	-	-	-	-	3.52	3.52	3.52	4.10	-	-	-	-	-	-	14.66	5.50	
12	12	12	12	-	-	-	-	3.52	3.52	3.52	3.52	-	-	-	-	-	-	14.08	5.20	
9	14	18	18	-	-	-	-	2.34	3.64	4.67	4.67	-	-	-	-	-	-	15.33	5.89	
9	14	14	24	-	-	-	-	2.30	3.57	3.57	6.12	-	-	-	-	-	-	15.57	5.88	
9	14	14	18	-	-	-	-	2.49	3.87	3.87	4.97	-	-	-	-	-	-	15.21	5.90	
9	14	14	14	-	-	-	-	2.64	4.10	4.10	4.10	-	-	-	-	-	-	14.94	5.65	
9	12	18	18	-	-	-	-	2.46	3.28	4.90	4.90	-	-	-	-	-	-	15.54	5.90	
9	12	14	24	-	-	-	-	2.34	3.12	3.64	6.23	-	-	-	-	-	-	15.33	5.89	
9	12	14	18	-	-	-	-	2.53	3.37	3.93	5.05	-	-	-	-	-	-	14.87	5.90	
9	12	14	14	-	-	-	-	2.64	3.52	4.10	4.10	-	-	-	-	-	-	14.36	5.35	
9	12	12	24	-	-	-	-	2.46	3.28	3.28	6.54	-	-	-	-	-	-	15.55	5.90	
9	12	12	18	-	-	-	-	2.64	3.52	3.52	5.27	-	-	-	-	-	-	14.95	5.65	
9	12	12	14	-	-	-	-	2.64	3.52	3.52	4.10	-	-	-	-	-	-	13.78	5.05	
9	12	12	12	-	-	-	-	2.64	3.52	3.52	3.52	-	-	-	-	-	-	13.20	4.73	
9	9	18	24	-	-	-	-	2.32	2.32	4.63	6.18	-	-	-	-	-	-	15.45	5.89	
9	9	18	18	-	-	-	-	2.51	2.51	5.01	5.01	-	-	-	-	-	-	15.04	5.90	
9	9	14	24	-	-	-	-	2.47	2.47	3.84	6.59	-	-	-	-	-	-	15.38	5.90	
9	9	14	18	-	-	-	-	2.64	2.64	4.10	5.27	-	-	-	-	-	-	14.65	5.50	
9	9	14	14	-	-	-	-	2.64	2.64	4.10	4.10	-	-	-	-	-	-	13.48	4.89	
9	9	12	24	-	-	-	-	2.51	2.51	3.35	6.68	-	-	-	-	-	-	15.05	5.90	
9	9	12	18	-	-	-	-	2.64	2.64	3.52	5.27	-	-	-	-	-	-	14.07	5.20	
9	9	12	14	-	-	-	-	2.64	2.64	3.52	4.10	-	-	-	-	-	-	12.90	4.57	
9	9	9	14	-	-	-	-	2.64	2.64	2.64	4.10	-	-	-	-	-	-	12.02	4.08	
9	9	9	12	-	-	-	-	2.64	2.64	2.64	3.52	-	-	-	-	-	-	11.44	3.74	
7	18	18	18	-	-	-	-	1.79	4.59	4.59	4.59	-	-	-	-	-	-	15.56	5.88	
7	14	18	18	-	-	-	-	1.91	3.82	4.91	4.91	-	-	-	-	-	-	15.54	5.90	
7	14	14	24	-	-	-	-	1.82	3.64	3.64	6.24	-	-	-	-	-	-	15.33	5.89	
7	14	14	18	-	-	-	-	1.96	3.93	3.93	5.05	-	-	-	-	-	-	14.87	5.90	
7	14	14	14	-	-	-	-	2.05	4.10	4.10	4.10	-	-	-	-	-	-	14.35	5.35	
7	12	18	18	-	-	-	-	1.79	3.07	4.59	6.12	-	-	-	-	-	-	15.57	5.88	
7	12	18	18	-	-	-	-	1.93	3.32	4.97	4.97	-	-	-	-	-	-	15.21	5.90	
7	12	14	24	-	-	-	-	1.91	3.28	3.82	6.54	-	-	-	-	-	-	15.54	5.90	
7	12	14	18	-	-	-	-	2.05	3.52	4.10	5.27	-	-	-	-	-	-	14.94	5.65	
7	12	14	14	-	-	-	-	2.05	3.52	4.10	4.10	-	-	-	-	-	-	13.77	5.05	
7	12	12	24	-	-	-	-	1.93	3.32	3.32	6.63	-	-	-	-	-	-	15.21	5.90	
7	12	12	18	-	-	-	-	2.05	3.52	3.52	5.27	-	-	-	-	-	-	14.36	5.35	
7	12	12	14	-	-	-	-	2.05	3.52	3.52	4.10	-	-	-	-	-	-	13.19	4.73	
7	12	12	12	-	-	-	-	2.05	3.52	3.52	3.52	-	-	-	-	-	-	12.61	4.41	
7	9	18	24	-	-	-	-	1.84	2.36	4.72	6.29	-	-	-	-	-	-	15.21	5.90	
7	9	18	18	-	-	-	-	2.05	2.64	5.27	5.27	-	-	-	-	-	-	15.23	5.79	
7	9	14	24	-	-	-	-	1.95	2.51	3.90	6.68	-	-	-	-	-	-	15.04	5.90	
7	9	14	18	-	-	-	-	2.05	2.64	4.10	5.27	-	-	-	-	-	-	14.06	5.20	
7	9	12	24	-	-	-	-	2.05	2.64	3.52	7.03	-	-	-	-	-	-	15.24	5.79	
7																				

8 Rooms Multi cooling

AOYG4SLBT8	Combination of indoor unit								COOLING OPERATION										
									Cooling Capacity									Total	Input power
									Room 1	Room 2	Room 3	Room 4	Room 5	Room 6	Room 7	Room 8	Room 8		
											KW	KW							
6 Room	7	9	9	9	9	18	-	-	1.79	2.30	2.30	2.30	2.30	4.59	-	-	15.57	5.88	
	7	9	9	9	9	12	-	-	1.93	2.49	2.49	2.49	2.49	3.32	-	-	15.22	5.90	
	7	9	9	9	9	9	-	-	2.05	2.64	2.64	2.64	2.64	2.64	-	-	15.25	5.79	
	7	7	12	12	12	12	-	-	1.77	1.77	3.04	3.04	3.04	3.04	-	-	15.69	5.87	
	7	7	9	12	12	14	-	-	1.79	1.79	2.30	3.07	3.07	3.57	-	-	15.57	5.88	
	7	7	9	12	12	12	-	-	1.82	1.82	2.34	3.12	3.12	3.12	-	-	15.34	5.89	
	7	7	9	9	14	14	-	-	1.80	1.80	2.32	3.60	3.60	3.60	-	-	15.45	5.89	
	7	7	9	9	12	18	-	-	1.77	1.77	2.28	2.28	3.04	4.55	-	-	15.69	5.87	
	7	7	9	9	12	14	-	-	1.83	1.83	2.36	2.36	3.15	3.67	-	-	15.21	5.90	
	7	7	9	9	12	12	-	-	1.92	1.92	2.47	2.47	3.30	3.30	-	-	15.38	5.90	
	7	7	9	9	9	18	-	-	1.82	1.82	2.34	2.34	2.34	4.67	-	-	15.33	5.89	
	7	7	9	9	9	14	-	-	1.93	1.93	2.49	2.49	2.49	3.87	-	-	15.21	5.90	
	7	7	9	9	9	12	-	-	1.96	1.96	2.53	2.53	2.53	3.37	-	-	14.88	5.90	
	7	7	9	9	9	9	-	-	2.05	2.05	2.64	2.64	2.64	2.64	-	-	14.66	5.50	
	7	7	7	12	14	14	-	-	1.79	1.79	1.79	3.07	3.57	3.57	-	-	15.57	5.88	
	7	7	7	12	12	14	-	-	1.82	1.82	1.82	3.12	3.12	3.64	-	-	15.33	5.89	
	7	7	7	12	12	12	-	-	1.91	1.91	1.91	3.28	3.28	3.28	-	-	15.55	5.90	
	7	7	7	9	14	18	-	-	1.77	1.77	1.77	2.28	3.54	4.55	-	-	15.68	5.87	
	7	7	7	9	14	14	-	-	1.84	1.84	1.84	2.36	3.67	3.67	-	-	15.21	5.90	
	7	7	7	9	12	18	-	-	1.80	1.80	1.80	2.32	3.09	4.63	-	-	15.45	5.89	
	7	7	7	9	12	14	-	-	1.92	1.92	1.92	2.47	3.30	3.84	-	-	15.38	5.90	
	7	7	7	9	12	12	-	-	1.95	1.95	1.95	2.51	3.35	3.35	-	-	15.05	5.90	
	7	7	7	9	9	18	-	-	1.91	1.91	1.91	2.46	2.46	4.90	-	-	15.54	5.90	
	7	7	7	9	9	14	-	-	1.96	1.96	1.96	2.53	2.53	3.93	-	-	14.87	5.90	
	7	7	7	9	9	12	-	-	2.05	2.05	2.05	2.64	2.64	3.52	-	-	14.95	5.65	
	7	7	7	9	9	9	-	-	2.05	2.05	2.05	2.64	2.64	2.64	-	-	14.07	5.20	
	7	7	7	7	14	18	-	-	1.80	1.80	1.80	1.80	3.60	4.63	-	-	15.45	5.89	
	7	7	7	7	14	14	-	-	1.92	1.92	1.92	1.92	3.84	3.84	-	-	15.37	5.90	
	7	7	7	7	12	18	-	-	1.84	1.84	1.84	1.84	3.15	4.72	-	-	15.21	5.90	
	7	7	7	7	12	14	-	-	1.95	1.95	1.95	1.95	3.35	3.90	-	-	15.04	5.90	
	7	7	7	7	12	12	-	-	2.05	2.05	2.05	2.05	3.52	3.52	-	-	15.24	5.79	
	7	7	7	7	9	24	-	-	1.79	1.79	1.79	1.79	2.30	6.12	-	-	15.57	5.88	
	7	7	7	7	9	18	-	-	1.93	1.93	1.93	1.93	2.49	4.97	-	-	15.21	5.90	
	7	7	7	7	9	14	-	-	2.05	2.05	2.05	2.05	2.64	4.10	-	-	14.94	5.65	
	7	7	7	7	9	12	-	-	2.05	2.05	2.05	2.05	2.64	3.52	-	-	14.36	5.35	
	7	7	7	7	9	9	-	-	2.05	2.05	2.05	2.05	2.64	2.64	-	-	13.48	4.89	
	7	7	7	7	7	24	-	-	1.82	1.82	1.82	1.82	1.82	6.24	-	-	15.33	5.89	
	7	7	7	7	7	18	-	-	1.96	1.96	1.96	1.96	1.96	5.05	-	-	14.87	5.90	
	7	7	7	7	7	14	-	-	2.05	2.05	2.05	2.05	2.05	4.10	-	-	14.35	5.35	
	7	7	7	7	7	12	-	-	2.05	2.05	2.05	2.05	2.05	3.52	-	-	13.77	5.05	
	7	7	7	7	7	9	-	-	2.05	2.05	2.05	2.05	2.05	2.64	-	-	12.89	4.57	
	7	7	7	7	7	7	-	-	2.05	2.05	2.05	2.05	2.05	2.05	-	-	12.30	4.24	
	7 Room	7	9	9	9	9	9	-	-	1.78	2.30	2.30	2.30	2.30	2.30	-	-	15.57	5.88
		7	7	9	9	9	9	12	-	1.77	1.77	2.28	2.28	2.28	3.04	-	-	15.69	5.87
		7	7	9	9	9	9	9	-	1.82	1.82	2.34	2.34	2.34	2.34	-	-	15.34	5.89
		7	7	7	9	9	9	14	-	1.77	1.77	1.77	2.28	2.28	3.54	-	-	15.69	5.87
		7	7	7	9	9	9	12	-	1.80	1.80	1.80	2.32	2.32	3.09	-	-	15.45	5.89
		7	7	7	9	9	9	9	-	1.91	1.91	1.91	2.46	2.46	2.46	2.46	-	-	15.55
7		7	7	7	9	12	-	-	1.79	1.79	1.79	1.79	2.30	3.07	3.07	-	-	15.57	5.88
7		7	7	7	9	9	14	-	1.80	1.80	1.80	1.80	2.32	2.32	3.60	-	-	15.45	5.89
7		7	7	7	9	9	12	-	1.83	1.83	1.83	1.83	2.36	2.36	3.15	-	-	15.21	5.90
7		7	7	7	9	9	9	-	1.93	1.93	1.93	1.93	2.49	2.49	2.49	-	-	15.21	5.90
7		7	7	7	7	12	14	-	1.79	1.79	1.79	1.79	1.79	3.07	3.57	-	-	15.57	5.88
7		7	7	7	7	12	12	-	1.82	1.82	1.82	1.82	1.82	3.12	3.12	-	-	15.33	5.89
7		7	7	7	7	9	18	-	1.77	1.77	1.77	1.77	2.28	4.55	-	-	15.68	5.87	
7		7	7	7	7	9	14	-	1.84	1.84	1.84	1.84	1.84	2.36	3.67	-	-	15.21	5.90
7		7	7	7	7	9	12	-	1.92	1.92	1.92	1.92	2.47	3.30	-	-	15.38	5.90	
7		7	7	7	7	9	9	-	1.96	1.96	1.96	1.96	1.96	2.53	2.53	-	-	14.87	5.90
7		7	7	7	7	7	18	-	1.80	1.80	1.80	1.80	1.80	4.63	-	-	15.45	5.89	
7		7	7	7	7	7	14	-	1.92	1.92	1.92	1.92	1.92	3.84	-	-	15.37	5.90	
7		7	7	7	7	7	12	-	1.95	1.95	1.95	1.95	1.95	3.35	-	-	15.04	5.90	
7		7	7	7	7	7	9	-	2.05	2.05	2.05	2.05	2.05	2.64	-	-	14.94	5.65	
7		7	7	7	7	7	7	-	2.05	2.05	2.05	2.05	2.05	2.05	-	-	14.35	5.35	
8 Room		7	7	7	7	9	9	9	1.77	1.77	1.77	1.77	1.77	2.28	2.28	2.28	15.69	5.87	
		7	7	7	7	7	9	9	1.80	1.80	1.80	1.80	1.80	1.80	2.32	2.32	15.45	5.89	
		7	7	7	7	7	7	12	1.79	1.79	1.79	1.79	1.79	1.79	1.79	3.07	15.57	5.88	
		7	7	7	7	7	7	9	1.84	1.84	1.84	1.84	1.84	1.84	1.84	2.36	15.21	5.90	
		7	7	7	7	7	7	7	1.92	1.92	1.92	1.92	1.92	1.92	1.92	1.92	15.37	5.90	

Note: •Cooling capacity is based on 27°CDB/19°CWB(indoor temperature),35°CDB(outdoor temperature)  
 •Pipe Length: 5 m (Outdoor unit to Branch box), 3 m (Branch box to Indoor unit)  
 •Height difference: 0 m (Outdoor unit to Indoor unit)  
 •The values in this table should be used only as a guide. These values are calculated at standard conditions.  
 To fix your selection of models, select them according to "Model Selection" in the D&T manual.

8 Rooms Multi heating

AOYG4SLBT8	Combination of indoor unit								HEATING OPERATION										
									Heating Capacity									Total	Input power
									Room 1	Room 2	Room 3	Room 4	Room 5	Room 6	Room 7	Room 8	Room 8		
											KW	KW							
2 Room	24	24	-	-	-	-	-	-	7.91	7.91	-	-	-	-	-	-	15.82	5.07	
	18	24	-	-	-	-	-	-	5.86	7.91	-	-	-	-	-	-	13.77	4.21	
	18	18	24	-	-	-	-	-	5.32	5.32	7.18	-	-	-	-	-	17.82	5.98	
	18	18	18	-	-	-	-	-	5.79	5.79	5.79	-	-	-	-	-	17.38	5.43	
	14	24	24	-	-	-	-	-	4.26	7.02	7.02	-	-	-	-	-	18.31	5.98	
	14	18	24	-	-	-	-	-	4.59	5.61	7.57	-	-	-	-	-	17.77	5.70	
	14	18	18	-	-	-	-	-	4.78	5.84	5.84	-	-	-	-	-	16.46	5.11	
	14	14	24	-	-	-	-	-	4.75	4.75	7.82	-	-	-	-	-	17.32	5.23	
	14	14	18	-	-	-	-	-	4.80	4.80	5.86	-	-	-	-	-	15.46	4.75	
	14*	14*	14*	-	-	-	-	-	4.80	4.80	4.80	-	-	-	-	-	14.40	4.21	
	12	24	24	-	-	-	-	-	3.58	7.15	7.15	-	-	-	-	-	17.89	5.98	
	12	18	24	-	-	-	-	-	3.84	5.68	7.67	-	-	-	-	-	17.19	5.43	
	12	18	18	-	-	-	-	-	3.96	5.86	5.86	-	-	-	-	-	15.68	5.07	
	12	14	24	-	-	-	-	-	3.94	4.78	7.87	-	-	-	-	-	16.59	5.11	
	12	14	18	-	-	-	-	-	3.96	4.80	5.86	-	-	-	-	-	14.62	4.46	
	12*	14*	14*	-	-	-	-	-	3.96	4.80	4.80	-	-	-	-	-	13.56	4.00	
	12	12	24	-	-	-	-	-	3.96	3.96	7.91	-	-	-	-	-	15.83	5.07	
	12	12	18	-	-	-	-	-	3.96	3.96	5.86	-	-	-</					

8 Rooms Multi heating

AOYG4SLBT8	Combination of indoor unit								HEATING OPERATION										
									Heating Capacity									Total	Input power
									Room 1	Room 2	Room 3	Room 4	Room 5	Room 6	Room 7	Room 8	Room 8		
											KW	KW							
4 Room	7	7	14	18	-	-	-	-	2.37	2.37	4.80	5.86	-	-	-	-	15.40	4.75	
	7	7	14	14	-	-	-	-	2.37	2.37	4.80	4.80	-	-	-	-	14.34	4.21	
	7	7	12	24	-	-	-	-	2.36	2.36	3.94	7.87	-	-	-	-	16.53	5.11	
	7	7	12	18	-	-	-	-	2.37	2.37	3.96	5.86	-	-	-	-	14.56	4.46	
	7	7	12	14	-	-	-	-	2.37	2.37	3.96	4.80	-	-	-	-	13.50	4.00	
	7	7	9	24	-	-	-	-	2.37	2.37	2.99	7.91	-	-	-	-	15.64	4.91	
	7	7	9	18	-	-	-	-	2.37	2.37	2.99	5.86	-	-	-	-	13.59	4.10	
	7	7	7	24	-	-	-	-	2.37	2.37	2.37	7.91	-	-	-	-	15.02	4.60	
	7	7	7	18	-	-	-	-	2.37	2.37	2.37	5.86	-	-	-	-	12.97	3.90	
	12	12	12	12	14	-	-	-	3.51	3.51	3.51	3.51	4.26	-	-	-	18.32	5.98	
	12	12	12	12	12	-	-	-	3.58	3.58	3.58	3.58	3.58	-	-	-	17.90	5.98	
	9	12	12	14	14	-	-	-	2.66	3.52	3.52	4.27	4.27	-	-	-	18.26	5.98	
9	12	12	12	14	-	-	-	2.71	3.59	3.59	3.59	4.35	-	-	-	17.84	5.98		
9	12	12	12	12	-	-	-	2.85	3.77	3.77	3.77	3.77	-	-	-	17.95	5.87		
9	9	14	14	14	-	-	-	2.67	2.67	4.28	4.28	4.28	-	-	-	18.19	5.98		
9	9	12	14	18	-	-	-	2.66	2.66	3.52	4.26	5.21	-	-	-	18.30	5.98		
9	9	12	14	14	-	-	-	2.72	2.72	3.60	4.37	4.37	-	-	-	17.77	5.98		
9	9	12	12	18	-	-	-	2.71	2.71	3.58	3.58	5.30	-	-	-	17.88	5.98		
9	9	12	12	14	-	-	-	2.86	2.86	3.78	3.78	4.58	-	-	-	17.86	5.70		
9	9	12	12	12	-	-	-	2.89	2.89	3.83	3.83	3.83	-	-	-	17.28	5.43		
9	9	9	14	18	-	-	-	2.71	2.71	2.71	4.36	5.32	-	-	-	17.82	5.98		
9	9	9	14	14	-	-	-	2.86	2.86	2.86	4.59	4.59	-	-	-	17.77	5.56		
9	9	9	12	18	-	-	-	2.85	2.85	3.78	5.59	5.59	-	-	-	17.92	5.87		
9	9	9	12	14	-	-	-	2.90	2.90	2.90	3.84	4.65	-	-	-	17.19	5.32		
9	9	9	12	12	-	-	-	2.97	2.97	2.97	3.93	3.93	-	-	-	16.78	5.16		
9	9	9	9	24	-	-	-	2.70	2.70	2.70	7.14	7.14	-	-	-	17.94	5.98		
9	9	9	9	18	-	-	-	2.89	2.89	2.89	5.67	5.67	-	-	-	17.25	5.43		
9	9	9	9	14	-	-	-	2.97	2.97	2.97	4.77	4.77	-	-	-	16.67	5.11		
9	9	9	9	12	-	-	-	2.99	2.99	2.99	3.96	3.96	-	-	-	15.92	5.07		
9	9	9	9	9	-	-	-	2.99	2.99	2.99	2.99	2.99	-	-	-	14.95	4.60		
7	12	14	14	14	-	-	-	2.10	3.51	4.25	4.25	4.25	-	-	-	18.37	5.98		
7	12	12	14	14	-	-	-	2.14	3.57	3.57	4.33	4.33	-	-	-	17.95	5.98		
7	12	12	12	18	-	-	-	2.13	3.56	3.56	3.56	5.26	-	-	-	18.06	5.98		
7	12	12	12	14	-	-	-	2.25	3.76	3.76	3.76	4.56	-	-	-	18.10	5.87		
7	12	12	12	12	-	-	-	2.28	3.81	3.81	3.81	3.81	-	-	-	17.52	5.56		
7	9	14	14	18	-	-	-	2.09	2.64	4.24	4.24	5.18	-	-	-	18.40	5.98		
7	9	14	14	14	-	-	-	2.14	2.71	4.34	4.34	4.34	-	-	-	17.88	5.98		
7	9	12	14	18	-	-	-	2.13	2.69	3.57	4.32	5.28	-	-	-	17.99	5.98		
7	9	12	14	14	-	-	-	2.26	2.85	3.77	4.57	4.57	-	-	-	18.01	5.70		
7	9	12	12	18	-	-	-	2.25	2.84	3.76	3.76	5.56	-	-	-	18.16	5.98		
7	9	12	12	14	-	-	-	2.28	2.88	3.82	3.82	4.63	-	-	-	17.43	5.43		
7	9	12	12	12	-	-	-	2.35	2.96	3.92	3.92	3.92	-	-	-	17.09	5.23		
7	9	9	18	18	-	-	-	2.13	2.69	2.69	5.27	5.27	-	-	-	18.04	5.98		
7	9	9	14	18	-	-	-	2.25	2.84	2.84	4.56	5.57	-	-	-	18.07	5.87		
7	9	9	14	14	-	-	-	2.29	2.89	2.89	4.64	4.64	-	-	-	17.34	5.32		
7	9	9	12	24	-	-	-	2.12	2.68	2.68	3.55	7.08	-	-	-	18.11	5.98		
7	9	9	12	18	-	-	-	2.28	2.88	2.88	3.81	5.64	-	-	-	17.49	5.56		
7	9	9	12	14	-	-	-	2.35	2.97	2.97	3.93	4.76	-	-	-	16.97	5.16		
7	9	9	12	12	-	-	-	2.37	2.98	2.98	3.95	3.95	-	-	-	16.24	5.08		
7	9	9	9	24	-	-	-	2.17	2.74	2.74	2.74	7.24	-	-	-	17.63	5.98		
7	9	9	9	18	-	-	-	2.35	2.96	2.96	2.96	5.81	-	-	-	17.05	5.23		
7	9	9	9	14	-	-	-	2.37	2.99	2.99	2.99	4.79	-	-	-	16.12	5.07		
7	9	9	9	12	-	-	-	2.37	2.99	2.99	2.99	3.96	-	-	-	15.30	4.75		
7	9	9	9	9	-	-	-	2.37	2.99	2.99	2.99	2.99	-	-	-	14.33	4.33		
7	7	14	14	18	-	-	-	2.12	2.12	4.30	5.25	5.25	-	-	-	18.10	5.98		
7	7	14	14	14	-	-	-	2.25	2.25	4.55	4.55	4.55	-	-	-	18.16	5.70		
7	7	12	18	18	-	-	-	2.11	2.11	3.53	5.23	5.23	-	-	-	18.21	5.98		
7	7	12	14	18	-	-	-	2.16	2.16	3.62	4.38	5.35	-	-	-	17.68	5.98		
7	7	12	14	14	-	-	-	2.28	2.28	3.80	4.61	4.61	-	-	-	17.58	5.43		
7	7	12	12	24	-	-	-	2.11	2.11	3.52	3.52	7.03	-	-	-	18.29	5.98		
7	7	12	12	14	-	-	-	2.35	2.35	3.92	3.92	4.75	-	-	-	17.28	5.23		
7	7	12	12	12	-	-	-	2.36	2.36	3.94	3.94	3.94	-	-	-	16.54	5.11		
7	7	9	18	18	-	-	-	2.16	2.16	2.72	5.34	5.34	-	-	-	17.73	5.98		
7	7	9	14	24	-	-	-	2.11	2.11	2.67	4.28	7.05	-	-	-	18.22	5.98		
7	7	9	14	18	-	-	-	2.27	2.27	2.87	4.61	5.62	-	-	-	17.64	5.56		
7	7	9	14	14	-	-	-	2.35	2.35	2.96	4.75	4.75	-	-	-	17.16	5.16		
7	7	9	12	24	-	-	-	2.15	2.15	2.72	3.60	7.18	-	-	-	17.80	5.98		
7	7	9	12	18	-	-	-	2.34	2.34	2.96	3.92	5.80	-	-	-	17.36	5.32		
7	7	9	12	14	-	-	-	2.36	2.36	2.98	3.95	4.78	-	-	-	16.43	5.08		
7	7	9	12	12	-	-	-	2.37	2.37	2.99	3.96	3.96	-	-	-	15.65	4.91		
7	7	9	9	24	-	-	-	2.27	2.27	2.86	2.86	7.56	-	-	-	17.81	5.70		
7	7	9	9	18	-	-	-	2.36	2.36	2.98	2.98	5.83	-	-	-	16.51	5.11		
7	7	9	9	14	-	-	-	2.37	2.37	2.99	2.99	4.80	-	-	-	15.52	4.75		
7	7	9	9	12	-	-	-	2.37	2.37	2.99	2.99	3.96	-	-	-	14.68	4.46		
7	7	9	9	9	-	-	-	2.37	2.37	2.99	2.99	2.99	-	-	-	13.71	4.10		
7	7	7	18	18	-	-	-	2.26	2.26	2.26	5.58	5.58	-	-	-	17.95	5.87		
7	7	7	14	24	-	-	-	2.14	2.14	2.14	4.34	7.15	-	-	-	17.91	5.98		
7	7	7	14	18	-	-	-	2.30	2.30	2.30	4.65	5.68	-	-	-	17.22	5.32		
7	7	7	14	14	-	-	-	2.36	2.36	2.36	4.77	4.77	-	-	-	16.62	5.08		
7	7	7	12	24	-	-	-	2.25	2.25	2.25	3.77	7.52	-	-	-	18.05	5.87		
7	7	7	12	18	-	-	-	2.35	2.35	2.35	3.93	5.82	-	-	-	16.81	5.16		
7	7	7	12	14	-	-	-	2.37	2.37	2.37	3.96	4.80	-	-	-	15.87	4.91		
7	7	7	12	12	-	-	-	2.37	2.37	2.37	3.96	3.96	-	-	-	15.03	4.60		
7	7	7	9	24	-	-	-	2.29	2.29	2.29	2.89	7.63	-	-	-	17.38	5.43		
7	7	7	9	18	-	-	-	2.37	2.37	2.37	2.99	5.86	-	-	-	15.96	5.07		
7	7	7	9	14	-	-	-	2.37	2.37	2.37	2.99	4.80	-	-	-	14.90	4.46		
7	7	7	9	12	-	-	-	2.37	2.37	2.37	2.99	3.96	-	-	-	14.06	4.21		
7	7	7	9	9	-	-	-	2.37	2.37	2.37	2.99	2.99	-	-	-	13.09	3.90		
7	7	7	7	24	-	-	-	2.35	2.35	2.35	2.35	7.83	-	-	-	17.22	5.23		
7	7	7	7	18	-	-	-	2.37	2.37	2.37	2.37	5.86	-	-	-	15.34	4.75		
7	7	7	7	14	-	-	-	2.37	2.37	2.37	2.37	4.80	-	-	-	14.28	4.21		
7	7	7	7	12	-	-	-	2.37	2.37	2.37									